


## 不锈钢磁性侧弯平顶链 Stainless Steel Sideflexing Flat Top Chains with Magnetic System

节距 P=38.1mm CC※SA系列

Pitch P=38.1mm CC※SA Series

### CC※SA

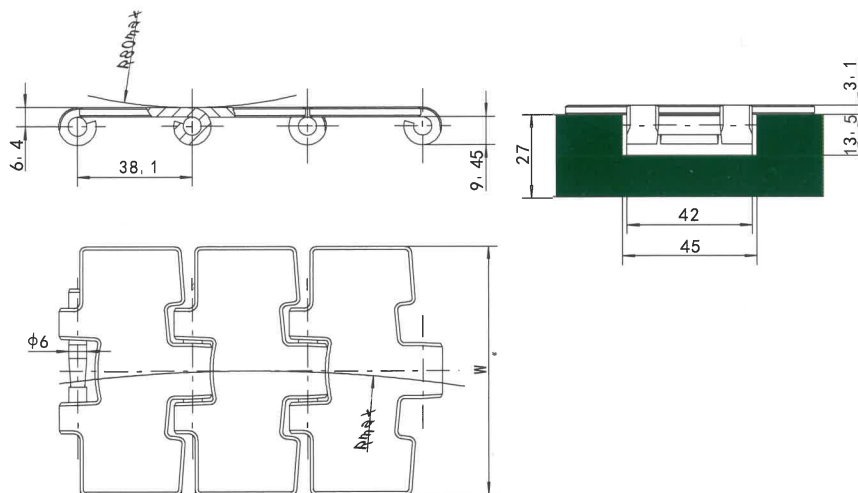

链号 Chain No.	链板 Chain				屈服强度 Yield Strength σ 0.2		侧弯半径 Sideflex Radius Rmax		重量 Weight	
	材料 Material	表面粗糙度 Surface Roughness	宽度 Width ( W )							
		μ m	mm	inch	kN	lbf	mm	inch	kg/m	lb/ft
CC13SA-6	马氏体型铬不锈钢 Martensitic Chromium Stainless Steel	0.8	82.5	3 1/4	5.4	1215	490	19 1/24	2.49	1.67
CC14SA-6			88.9	3 1/2			460	18 1/9	2.62	1.76
CC16SA-6			101.6	4			460	18 1/9	2.88	1.94
CC18SA-6			114.3	4 1/2			490	19 7/24	3.16	2.12
CC24SA-6			152.4	6			600	23 28/45	3.92	2.64
CC30SA-6			190.5	7 1/2			490	19 7/24	4.66	3.13

说明：1.这是一种能够在设定的轨道里进行曲线运行的链条，曲线轨道由于内镶有磁性，这些磁性与链板之间产生的吸力，能够保证链条在进行曲线运行时不发生翻倾现象；  
2.这种链条的活动铰链直径略大于812/815标准型链条，但由于标准平顶链链轮齿形上存在一个2mm的齿槽中心分离量，因此侧弯平顶链可直接使用812/815标准型链条的链轮；  
3.此系列链条只适合于中国市场使用；  
4.供货时，每条链条的标准长度为3.048m（10ft），计80节。

Note: 1.The Series are for the chains which are capable of having a curved running in a given track, as there are magnets inseted in the curved track, the force of attaction created between the magnets and the chain is capable of assuring that the problem of overturning won't happen when the chains are having a curved running;  
2.The dia. of the movable hinge of the chains is slightly larger than that of the movable hinge of 812/815 standard chains, however, as there is a 3mm pitch line clearance on the profile of a tooth of the sprockets of standard flat top chains, the sideflexing flat top chains can use the sprockets of 812/815 standard chains directly;  
3.The series of chains are only suitable for using on the Chinese market;  
4.When supplied, the standard length of each chain is 3.048m (10ft), total 80links.