


不锈钢侧弯平顶链 Stainless Steel Sideflexing Flat Top Chains

节距 P=38.1mm CC※SC 系列 “L”型导向板

Pitch P=38.1mm 8CC※SC Series “L” Type TAB Shoe

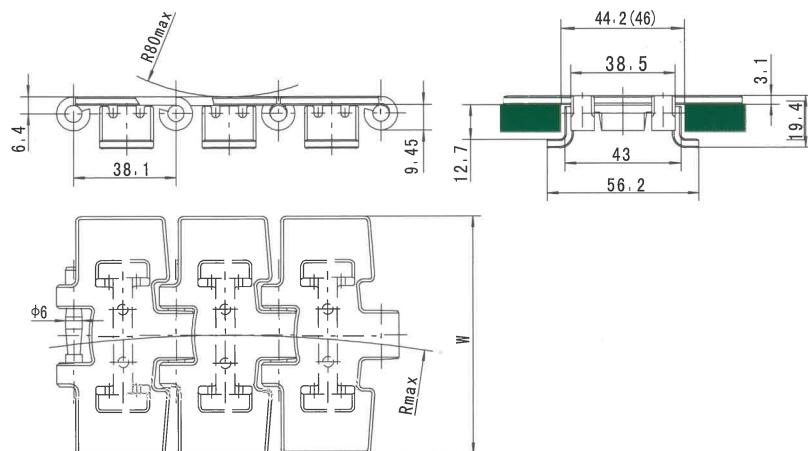

链号 Chain No.	链板 Chain				屈服强度 Yield Strength $\sigma_{0.2}$		侧弯半径 Sideflex Radius R_{max}		重量 Weight	
	材料 Material	表面粗糙度 Surface Roughness μm	宽度 Width (W)							
			mm	inch	kN	lbf	mm	inch	kg/m	lb/ft
CC13SC-6	奥氏体型铬镍不锈钢 Austenitic Chromium-Nickel Stainless Steel	0.8	82.5	3 1/4	5.4	1147	490	19 7/24	3.08	2.07
CC14SC-6			88.9	3 1/2			460	19 7/24	3.21	2.16
CC16SC-6			101.6	4			460	18 1/9	3.44	2.31
CC18SC-6			114.3	4 1/2			490	19 7/24	3.76	2.52
CC24SC-6			152.4	6			600	23 28/45	4.51	3.03
CC30SC-6			190.5	7 1/2			490	19 7/24	5.28	3.55

- 说明：1.由于链板底部焊接有“L”型导向板，因此链条在设定的轨道里进行曲线运行时，能够消除抬起翻倾的趋势；
 2.链板与导向板焊接时，会产生热变形，而且焊接热影响区的色泽也会发生变化。为保持链板具有良好的平整度和外观质量，所有经焊接的链板工作面均要完成一道研磨抛光的工序；
 3.曲线输送段导轨宽度为44.2mm，直线输送段导轨宽度为46mm；
 4.导向板材料为软质的奥氏体型铬镍不锈钢；
 5.只系列只适合中国市场使用；
 6.供货时，每条链条的标准长度为3.048m (10ft)，计80节。

- Note: 1. As the underside of chain is welded a "L" Type TAB Shoe, it can eliminate the trend of lifting and turning over when the chains are having a curved running in a given track;
 2. When the chain and the TAB shoe are together welded, it will produce hot deformation and have a colour change in the welding heat affective area. To keep a good flatness and appearance of chain, the working surface of the chain that has been welded needs to be polished by grinding;
 3. The width of the track in the curve conveying section is 44.2mm, and the one of the track in the straight conveying section is 46mm;
 4. The material of the TAB shoe is soft Austenitic Chromium-Nickel Stainless Steel;
 5. The Series are only suitable for using on the Chinese market;
 6. When supplied, the standard length of each chain is 3.048m (10ft), total 80links.