

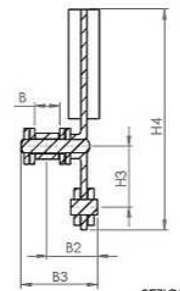
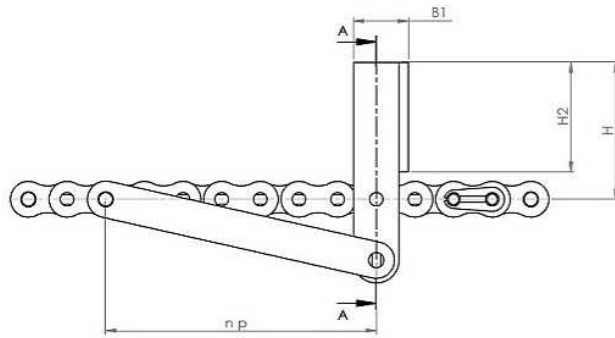


CATENE OE CON SPINTORI A SPINTA LATERALE

OE PUSHER DOG CHAIN

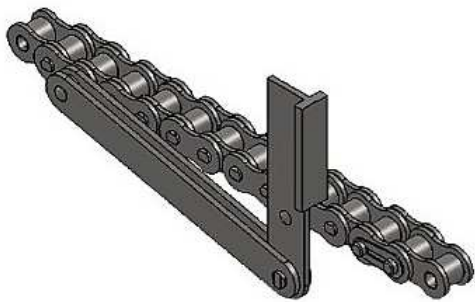

SEZIONE A-A

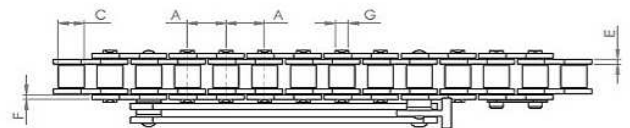

ISO STANDARD

CHAIN CODE	REF. DX SX	PITCH (MM)	INSIDE WIDTH	ROLLER DIAM MIN	PLATE WIDTH INNER MAX	PLATE WIDTH OUTER MAX	PIN DIAM. MAX	PIN LENGTH MAX	H SPINT					ISO606 TENSILE STRENGTH (NEWTONS) MIN	WEIGHT KG/M
		A	B	C	E	F	G	B3	H **	B1	H4	H2	B2		
08-B1 Z 20		12.700	7.750	8.510	1.550	1.550	4.450	26	29	14	46	22	17.5	17800	0.700
10-B1 Z 24		15.875	9.650	10.160	1.550	1.550	5.080	29.8	60	18	86	25	20	22200	0.960
12-B1 Z 24		19.050	11.680	12.070	1.810	1.810	5.720	36.3	70	18	102	30	25	28900	1.220
16-B1 Z 24		25.400	17.020	15.880	4.120	3.100	8.280	50.5	80	25	113	34	32.5	60000	2.800

H** Variabile su richiesta.