


CATENA A PIASTRE DRITTE GF

CHAIN STRAIGHT PLATE GF

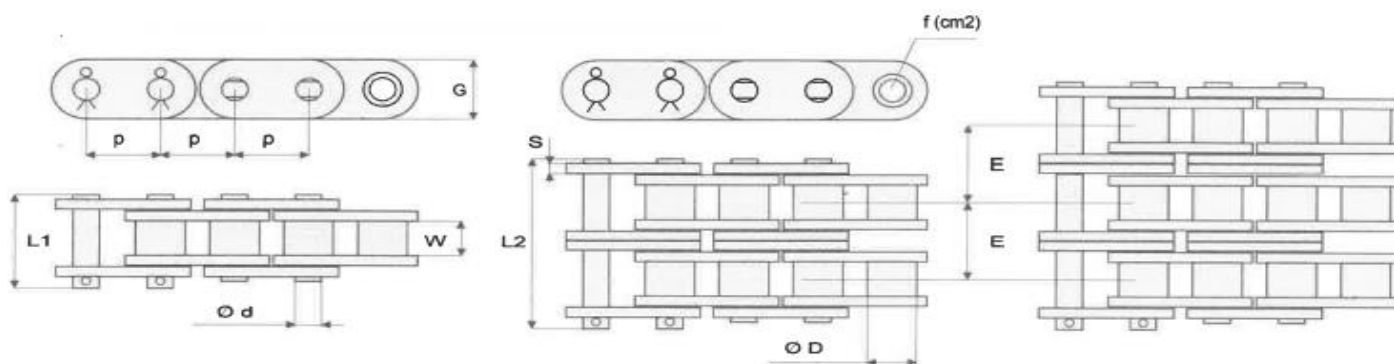

dimensioni in mm

Codice AS	DIMENSIONI CATENA							SIMPLEX				DUPLEX				TRIPLEX			
	passo	largh interna	rullo catena	perno catena	interasse	piastrea esterna	altezza piastrina	ingombro max	super snodo	carico rottura	peso catena	ingombro max	super snodo	carico rottura	peso catena	ingombro max	super snodo	carico rottura	peso catena
	p	W	D	d	E	S	G	L1	f (cm ²)	FB (KN)	q (Kg/m)	L2	f (cm ²)	FB (KN)	q (Kg/m)	L3	f (cm ²)	FB (KN)	q (Kg/m)
2191 std	9,525	5,72	6,35	3,28	10,24	1,0	8,2	13,8	0,28	11,3	0,41	24,0	0,56	19,4	0,8	34,2	0,84	25,4	1,2
1603 GF	12,70	7,75	8,51	4,45	13,92	1,5	11,8	19,4	0,50	19,8	0,70	33,3	1,01	39,0	1,35	47,2	1,51	54,5	2,0
1623 GF	15,875	9,56	10,16	5,08	16,59	1,5	14,7	22,1	0,67	26,6	0,95	38,8	1,34	50,5	1,85	55,4	2,02	72,5	2,8
1642 GF	19,05	11,68	12,07	5,72	19,46	1,8	16,1	25,2	0,89	32,8	1,25	44,7	1,79	66,0	2,50	64,2	2,68	95,0	3,8
1666 GF	25,40	17,02	15,88	8,28	31,88	3,0	21,0	40,5	2,10	71,4	2,70	72,1	4,21	145,0	5,40	104,0	6,31	218,0	8,0
1682 GF	31,75	19,56	19,05	10,19	36,45	3,5	26,4	47,0	2,96	99,2	3,60	83,5	5,91	225,0	7,20	120,0	8,87	310,0	11,0
1702 GF	38,10	25,40	25,40	14,63	48,36	5,0	33,4	60,1	5,54	173,5	6,70	108,5	11,09	350,0	13,50	156,9	16,63	515,0	21,0

C 35	9,525	4,78	(5,08)	3,59	10,1	1,25	9,0	14,2	0,27	10,2	0,39	24,3	0,54	20,0	0,69	34,4	0,81	30,0	1,05
C 40	12,70	7,95	7,92	3,97	14,4	1,5	12,0	19,1	0,44	16,9	0,65	33,5	0,88	33,8	1,19	47,9	1,32	50,7	1,78
C 50	15,875	9,53	10,16	5,08	18,1	2,0	15,0	23,9	0,70	27,8	1,15	42,0	1,40	55,6	2,04	60,1	2,10	83,4	3,1
C 60	19,05	12,70	11,91	5,96	22,8	2,4	18,0	28,7	1,05	38,0	1,70	51,5	2,10	75,6	3,03	74,3	3,15	114,0	4,5
C 80	25,40	15,88	15,88	7,94	29,3	3,2	24,1	36,6	1,78	70,5	2,67	65,7	3,56	143,0	5,07	95,0	5,34	214,0	7,6
C 100	31,75	19,05	19,05	9,54	35,8	4,0	30,1	44,1	2,61	107,8	4,19	79,9	5,22	215,0	7,53	115,7	7,83	323,0	11,3
C 120	38,10	25,40	22,23	11,11	45,4	4,8	36,2	55,2	3,92	147,1	6,12	100,7	7,84	294,0	11,0	146,2	11,76	441,0	16,5

I carichi di rottura dichiarati si intendono MINIMI EFFETTIVI, rilevati dai certificati della Fabbrica.

