


CATENA OE CON PERNI ESTESI DOPPI 1 LATO CON FERMO P. SPORGENTI CON SEDE SEIGER ISO

CHAIN OE WITH DOUBLE SIDE EXTENDED PINS WITH GROVE

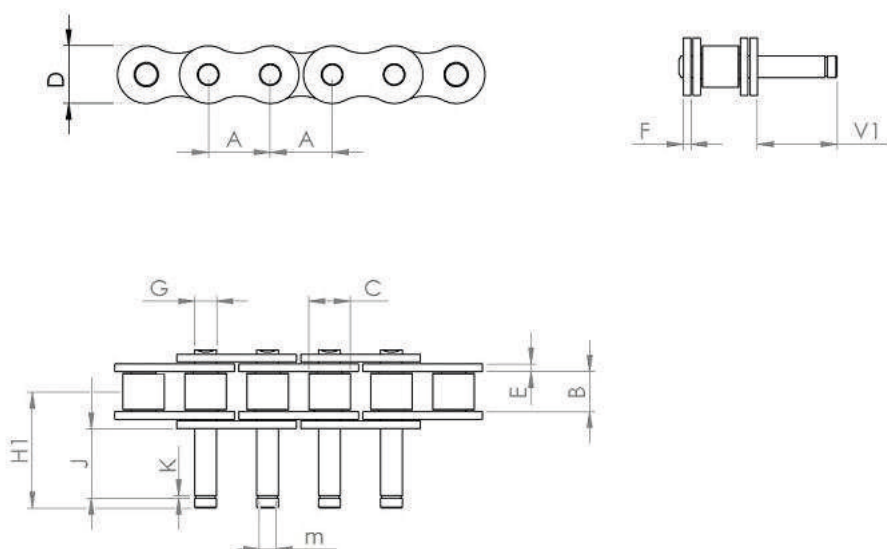

ISO STANDARD

REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	J	H1	V1	K	M	ISO606 TENSILE STRENGTH (NEWTONS) MIN
08B1	12.700	7.750	8.510	1.550	1.550	4.450	32.000	13.9	23.6	16.3	0.90	3.125	17800
10B1	15.875	9.650	10.160	1.550	1.550	5.080	36.700	16.6	27.3	19.0	1	3.61	22200
12B1	19.050	11.680	12.070	1.810	1.810	5.720	42.500	19.2	31.55	21.7	1.2	3.925	28900
16B1	25.400	17.020	15.880	4.120	3.100	8.280	68.300	32.3	50.85	34.70	1.25	7.15	60000