
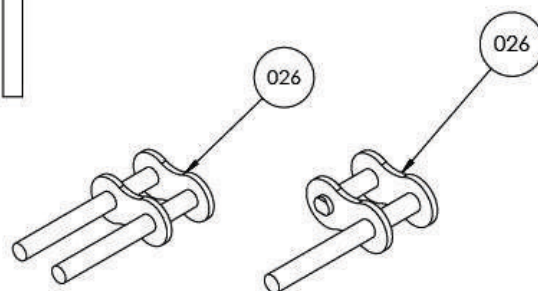
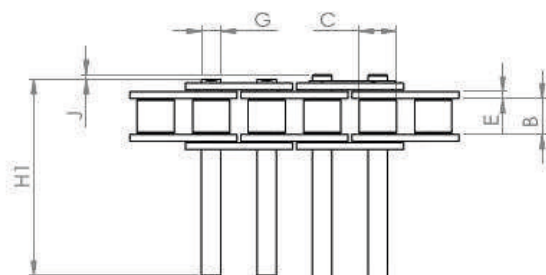

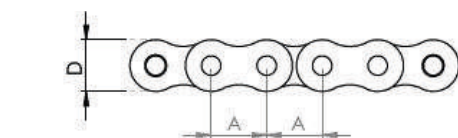


CATENA OE CON PERNI ESTESI TRIPLI 1 LATO ASA

P. SPORGENTI TRIPLI 1 LATO ASA

CHAIN OE WITH TRIPLEX SIDE EXTENDED PINS ASA

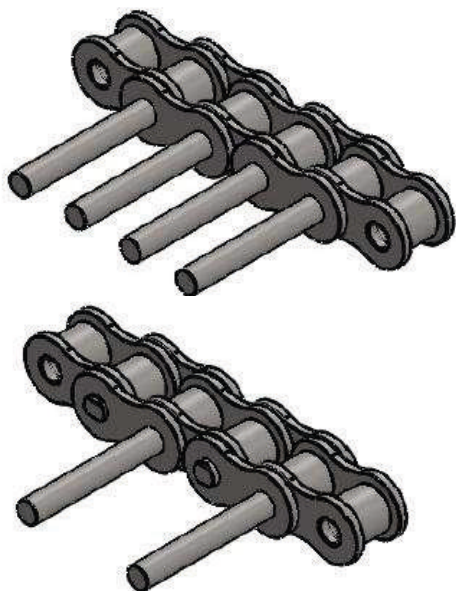

ANSI STANDARD

REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	V1	ISO606 TENSILE STRENGTH (NEWTONS) MIN
08A1	12.700	7.850	7.920	1.550	1.550	3.970	45.100	29.50	13900
10A1	15.875	9.400	10.160	2.040	2.040	5.080	56.500	37.10	21800
12A1	19.050	12.570	11.910	2.450	2.450	5.940	70.900	46.80	31300
16A1	25.400	15.750	15.880	3.250	3.250	7.940	90.600	60.10	55600