

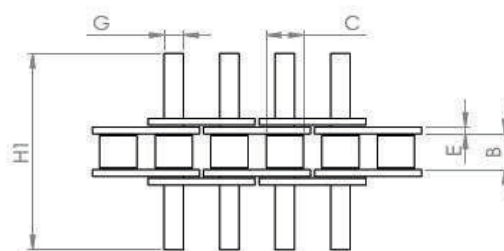

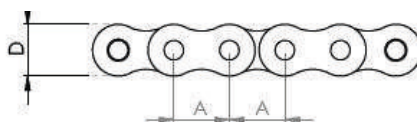


CATENA OE CON PERNI B-SPORGENTI DOPPI 2 LATI ISO-UNI

P. SPORGENTI DOPPI 2 LATI ISO CHAIN OE WITH DUPLEX 2 SIDE EXTENDED PINS ISO-UNI

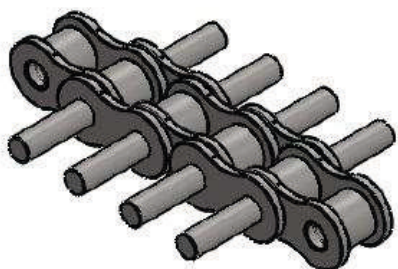

ISO STANDARD

REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	V2	ISO606 TENSILE STRENGTH (NEWTONS) MIN
04B1	6.000	2.800	4.000	0.600	0.600	1.850	12.500	3.5	3000
05B1	8.000	3.000	5.000	0.760	0.760	2.310	13.600	3.6	4400
06B1	9.525	5.720	6.350	1.290	1.040	3.280	23.000	6.1	8900
08B1	12.700	7.750	8.510	1.550	1.550	4.450	30.400	7.9	17800
10B1	15.875	9.650	10.160	1.550	1.550	5.080	35.400	9.3	22200
12B1	19.050	11.680	12.070	1.810	1.810	5.720	41.400	10.9	28900
16B1	25.400	17.020	15.880	4.120	3.100	8.280	66.800	17.4	60000
20B1	31.750	19.560	19.050	4.620	3.610	10.190	77.900	20.0	95000
24B1	38.100	25.400	25.400	6.100	5.080	14.630	101.000	26.2	160000