


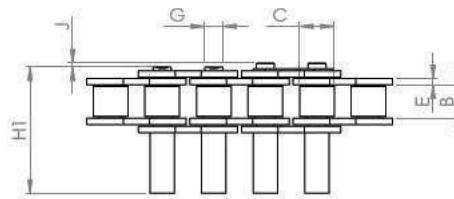

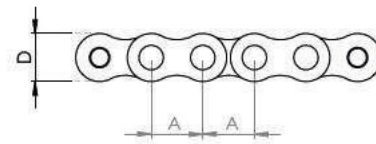


CATENA OE CON PERNI ESTESI 1 LATO DIAM. MAGGIORATO ISO-UNI P. SPORGENTI CON SPALLAMENTO ISO

CHAIN OE WITH DOUBLE SIDE EXTENDED PINS UNI-ISO
WITH INCREASED DIAMETER



ISO STANDARD

REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	D DIAMETRO SPALLAMENTO	V1	ISO606 TENSILE STRENGTH (NEWTONS) MIN
08B1	12.700	7.750	8.510	1.550	1.550	4.450	6	20	17800
10B1	15.875	9.650	10.160	1.550	1.550	5.080	8	20	22200
12B1	19.050	11.680	12.070	1.810	1.810	5.720	8	25	28900
16B1	25.400	17.020	15.880	4.120	3.100	8.280	10	30	60000