
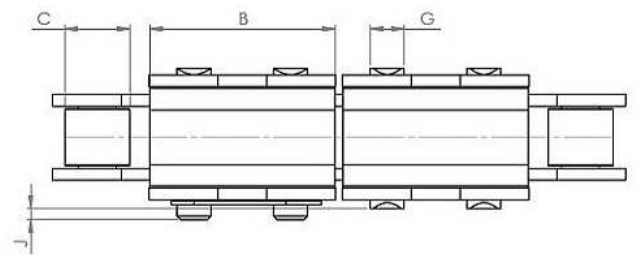
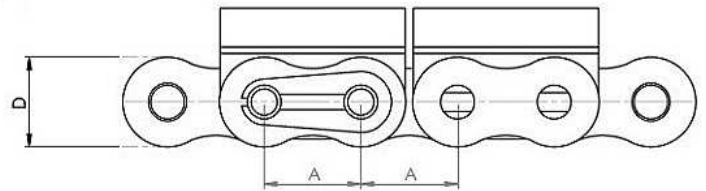




# CATENA OE CON ATTACCHI A PONTE IN GOMMA SEMPLICE VULCANIZZATA

## CHAIN OE POLYMER BLOCK SIMPLEX

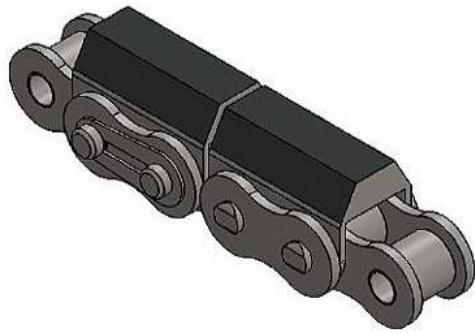

### ISO STANDARD

CHAIN CODE	REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	T	L	H3	H2	S	B	ISO606 TENSILE STRENGTH (NEWTONS) MIN
600520000	08-B1	12.700	7.750	8.510	4.450	19.500	11.5	14.5	8.3	12.3	1.3	24.32	18200
602750000	08-B1	12.700	7.750	8.510	4.450	19.500	11.5	14.5	8.3	20	1.3	24.32	18200
6010B1UG1	10-B1	15.875	9.650	10.160	5.080	21.900	11	16.4	10.5	13	1.3	30	23000
604680000	12-B1	19.050	11.680	12.700	5.720	25.900	10	19	13	21	1.8	35.6	28900
606570000	16-B1	25.400	17.020	15.880	8.280	39.300	24.8	30	15.4	21.4	1.8	48	60000
6020B1UG1	20-B1	31.750	19.560	19.050	10.190	46.200	30	34.8	19	27	2.4	56.15	95000