


# CATENE TRASPORTO RASCHIANTI FVC


## CHAINS CONVEYER FVC

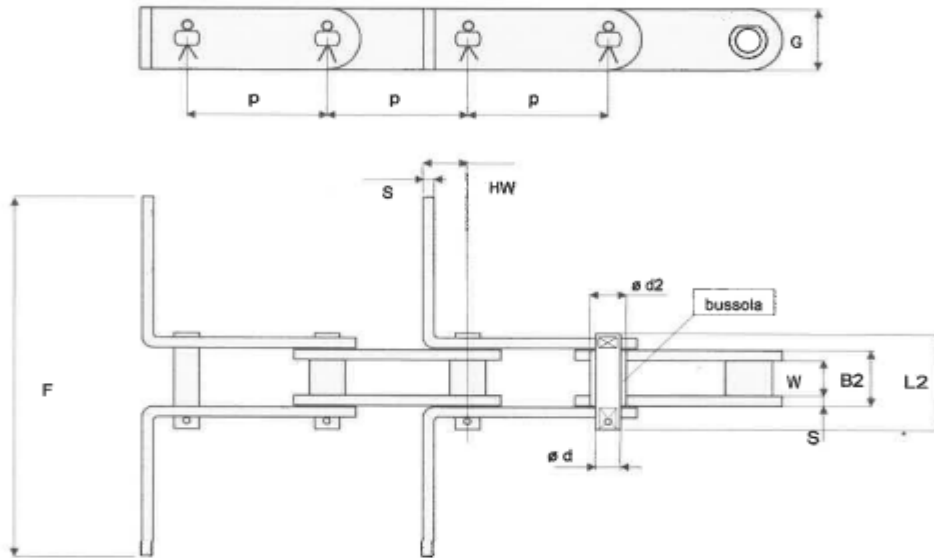

DIN 8165	p (mm)									
FVC - 63	50	63	80	100	125	160				
FVC - 90	50	63	80	100	125	160	200	250		
FVC - 112			80	100	125	160	200	250	315	400
FVC - 140			80	100	125	160	200	250	315	400
FVC - 180			100	125	160	200	250	315	400	500
FVC - 250				125	160	200	250	315	400	
FVC - 315					160	200	250	315	400	
FVC - 400					160	200	250	315	400	

Secondo Norma DIN 8165

dimensioni mm

 classe FVC	CARATTERISTICHE CATENE								CARATTERISTICHE ATTACCO			
	largh interna	perno catena	diametro bussola	largh maglia interna	spessore piastra	lunghezza perno	altezza piastra	(f) superf di snodo	carico rottura MIN	altezza piastra	largh frontale a richiesta	
	W	d	d2	B2	S	L2	G	(cm2)	(KN)	HW	F	S
FVC - 63	22,0	12,0	18,0	30,5	4,0	55,0	30,0	3,66	63,0	25,0	□	4,0
FVC - 90	25,0	14,0	20,0	35,5	5,0	62,0	35,0	4,97	90,0	30,0	□	5,0
FVC - 112	30,0	16,0	22,0	42,5	6,0	72,0	40,0	6,80	112,0	35,0	□	6,0
FVC - 140	35,0	18,0	26,0	47,5	6,0	80,0	45,0	8,55	140,0	45,0	□	6,0
FVC - 180	45,0	20,0	30,0	61,5	8,0	100,0	50,0	12,30	180,0	50,0	□	8,0
FVC - 250	55,0	26,0	36,0	72,0	8,0	114,0	60,0	18,70	250,0	55,0	□	8,0
FVC - 315	65,0	30,0	42,0	86,0	10,0	133,0	70,0	25,80	315,0	60,0	□	10,0
FVC - 400	70,0	31,0	44,0	96,0	12,0	151,0	70,0	30,70	400,0	65,0	□	12,0



OGNIBENE S.P.A. \_ VIA DEL TIPOGRAFO, 6 \_ 40138 BOLOGNA \_ ITALY  
 TEL: +39 051 534225 \_ FAX: +39 051 535083  
[sales@ognibenechaintech.it](mailto:sales@ognibenechaintech.it) \_ [www.ognibenechaintech.com](http://www.ognibenechaintech.com)