

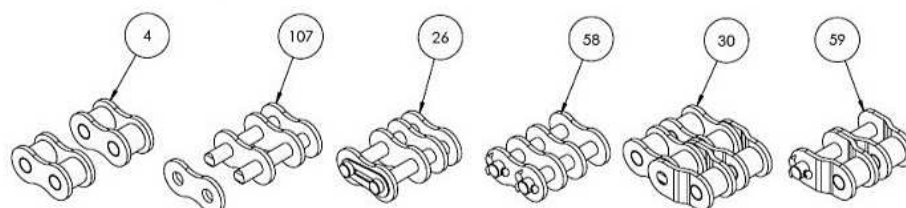


CATENE OE ZINCATE DOPPIE ASA

CHAIN ZINC PLATED DUPLEX ASA

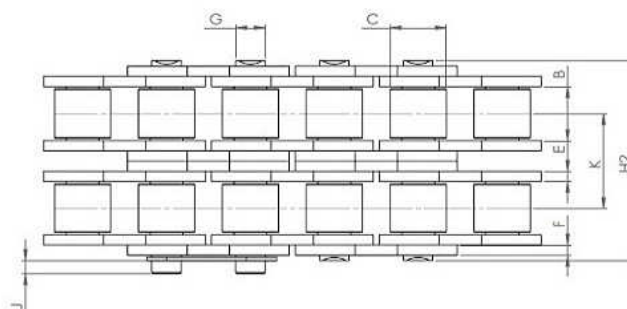

RENOLD
Superior Chain Technology

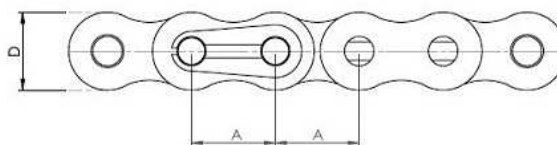

ANSI STANDARD

| CHAIN CODE | REF. | PITCH (MM) | INSIDE WIDTH | ROLLER DIAM MIN | PLATE HEIGHT MAX | PLATE WIDTH INNER MAX | PLATE WIDTH OUTER MAX | PIN DIAM. MAX | PIN LENGTH MAX | CONN. LINK EXTENSION MAX | TRANVERSE PITCH NOM | ISO606 TENSILE STRENGTH (NEWTONS) MIN | ISO606 TENSILE STRENGTH (NEWTONS) MED | WEIGHT KG/M |
|------------|--------|------------|--------------|-----------------|------------------|-----------------------|-----------------------|---------------|----------------|--------------------------|---------------------|---------------------------------------|---------------------------------------|-------------|
| | | A | B | C | D | E | F | G | H1 | J | K | | | |
| 530040200 | 40-A2 | 12.700 | 7.850 | 7.920 | 12.070 | 1.550 | 1.550 | 3.980 | 30.800 | 1.400 | 14.38 | 27800 | 28200 | 1.200 |
| 530050200 | 50-A2 | 15.875 | 9.400 | 10.160 | 15.090 | 2.030 | 2.030 | 5.090 | 38.400 | 1.100 | 18.11 | 43600 | 45000 | 2.100 |
| 530060200 | 60-A2 | 19.050 | 12.570 | 11.910 | 18.100 | 2.390 | 2.390 | 5.960 | 48.100 | 1.100 | 22.78 | 62600 | 65000 | 3.050 |
| 530080200 | 80-A2 | 25.400 | 15.750 | 15.880 | 24.130 | 3.250 | 3.250 | 7.940 | 61.900 | 3.000 | 29.29 | 111200 | 115200 | 5.500 |
| 5300100200 | 100-A2 | 31.750 | 18.900 | 19.050 | 30.170 | 4.060 | 4.060 | 9.540 | 75.400 | 4.200 | 35.76 | 174000 | 178000 | 8.400 |



OGNIBENE S.P.A. - VIA DEL TIPOGRAFO, 6 - 40138 BOLOGNA - ITALY
TEL: +39 051 534225 - FAX: +39 051 535083
sales@ognibenechaintech.it - www.ognibenechaintech.com