

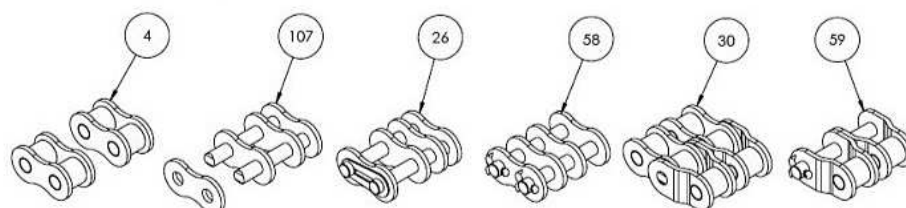


CATENE OE ZINCATE DOPPIE ISO

CHAIN ZINC PLATED DUPLEX ISO

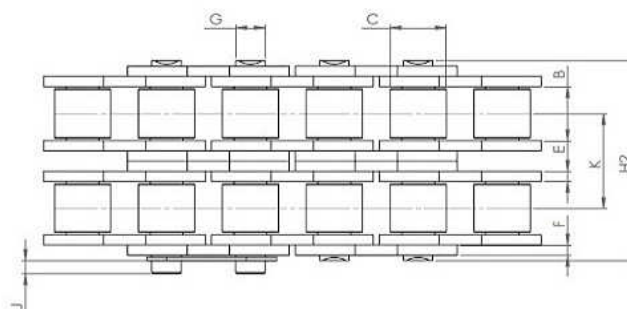

RENOLD
Superior Chain Technology

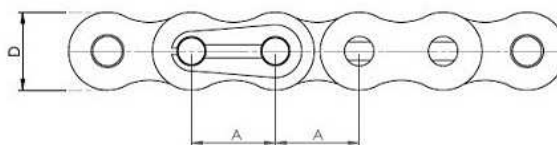

ISO STANDARD

CHAIN CODE	REF.	PITCH (MM)	INSIDE WIDTH	ROLLER DIAM MIN	PLATE HEIGHT MAX	PLATE WIDTH INNER MAX	PLATE WIDTH OUTER MAX	PIN DIAM. MAX	PIN LENGTH MAX	CONN. LINK EXTENSION MAX	TRANVERSE PICTH NOM	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
532192200	06-B2	9.525	5.720	6.350	8.260	1.300	1.040	3.280	23.000	1.300	10.24	16900	16900	0.740
531603200	08-B2	12.700	7.750	8.510	11.810	1.550	1.550	4.450	30.400	1.500	13.92	31100	31100	1.380
531623200	10-B2	15.875	9.650	10.160	14.730	1.550	1.550	5.080	35.400	1.300	16.59	44500	44500	1.800
531642200	12-B2	19.050	11.680	12.070	16.130	1.800	1.800	5.720	41.400	1.100	19.46	57800	57800	2.400
531666200	16-B2	25.400	17.020	15.880	21.080	3.760	3.100	8.280	68.000	5.400	31.88	106000	106000	5.500
531682200	20-B2	31.750	19.560	19.050	26.420	4.620	3.610	10.190	76.700	6.100	36.45	170000	170000	7.800
531702200	24-B2	38.100	25.400	25.400	33.400	6.100	5.080	14.630	101.300	6.800	48.36	280000	280000	14.800