


# CATENA OE FREE ROLLER A DOPPIA VELOCITA'

CHAIN OF FREE ROLLER DOUBLE SPEED

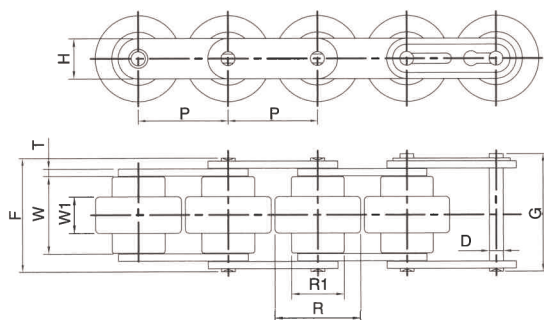

## REGULAR CHAIN


CHAIN NO.	Pitch		Width	Roller			Plate		Pin			Average Ultimate Strength kgf	Approx Weight kg/m
	P		W	Height	Dia		Height	Thick.	Dia	Length			
	inch	mm	mm	W1	R	R1	H(max)	T	D(max)	F	G		
C2040-JDS	1"	25.40	22.20	10.30	24.60	15.88	15.0	1.50	3.98	31.6	32.9	1800	0.82
C2050-JDS ★	1.25"	31.75	27.40	12.60	30.60	19.05	15.0	2.00	5.09	39.2	40.7	3000	1.40
C2060H-TDS	1.50"	38.10	40.60	20.00	37.00	17.80	18.0	3.20	5.96	56.8	58.35	4200	2.10
C2060H-JDS	1.50"	38.10	33.10	15.50	36.50	22.50	18.0	3.20	5.96	49.3	50.85	4200	2.00

## SOLID (SBR-L) CHAIN

CHAIN NO.	Pitch		Width	Roller			Plate		Pin			Average Ultimate Strength kgf	Approx Weight kg/m
	P		W	Height	Dia		Height	Thick.	Dia	Length			
	inch	mm	mm	W1	R	R1	H(max)	T	D(max)	F	G		
C2040SBR-L-JDS	1"	25.40	22.20	10.30	24.60	15.88	15.0	1.50	3.98	31.6	32.9	1800	0.82
C2050SBR-L-JDS ★	1.25"	31.75	27.40	12.60	30.60	19.05	15.0	2.00	5.09	39.2	40.7	3000	1.43
C2060HSBR-L-TDS	1.50"	38.10	40.60	20.00	37.00	17.80	18.0	3.20	5.96	56.8	58.35	4200	2.14
C2060HSBR-L-JDS	1.50"	38.10	33.10	15.50	36.50	22.50	18.0	3.20	5.96	49.3	50.85	4200	2.04

Electro-conductive Type Big Center Roller available at request.

★ Snap cover top available at size C2050 at request.

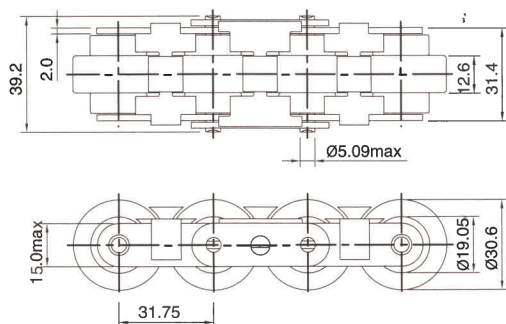

## SNAP COVER (CVR)



OGNIBENE S.P.A. - VIA DEL TIPOGRAFO, 6 - 40138 BOLOGNA - ITALY  
 TEL: +39 051 534225 - FAX: +39 051 535083  
[sales@ognibenechaintech.it](mailto:sales@ognibenechaintech.it) - [www.ognibenechaintech.com](http://www.ognibenechaintech.com)