

Valvola ZT-P



Valvola ZT-P


Valvola ZT-P

PRODOTTI DOSABILI : *Olii Lubrificanti - Olii evaporabili - Liquidi Lubro-refrigeranti - Liquidi anti-aderenti per stampaggio di materie plastiche - Liquidi protettivi - Olii Siliconici - Inchiostri - Lacche - Vernici - Diluenti -Pulitori Flussanti - Adesivi vinilici ecc..*

Le Valvole dosatrici ZT-P operano a bassa pressione escludendo gli effetti della nebulizzazione dei prodotti utilizzati garantendo ambienti di lavoro più sani e puliti.

DATI TECNICI

Alimentazione:	<i>Pneumatica</i>
Temperatura di esercizio:	<i>Da 0°C a 60°C</i>
Diametro tubi Ingresso	<i>6x4 PA 11</i>
Diametro tubi Uscita	<i>4x2 PA 11</i>
Volume Min.	<i>Tempo - Pressione Alim.</i>
Volume Max.	<i>Tempo - Pressione Alim.</i>
Viscosità lubrificante	<i>Liquidi</i>
Pressione alimentazione max.	<i>0,100 MPa</i>

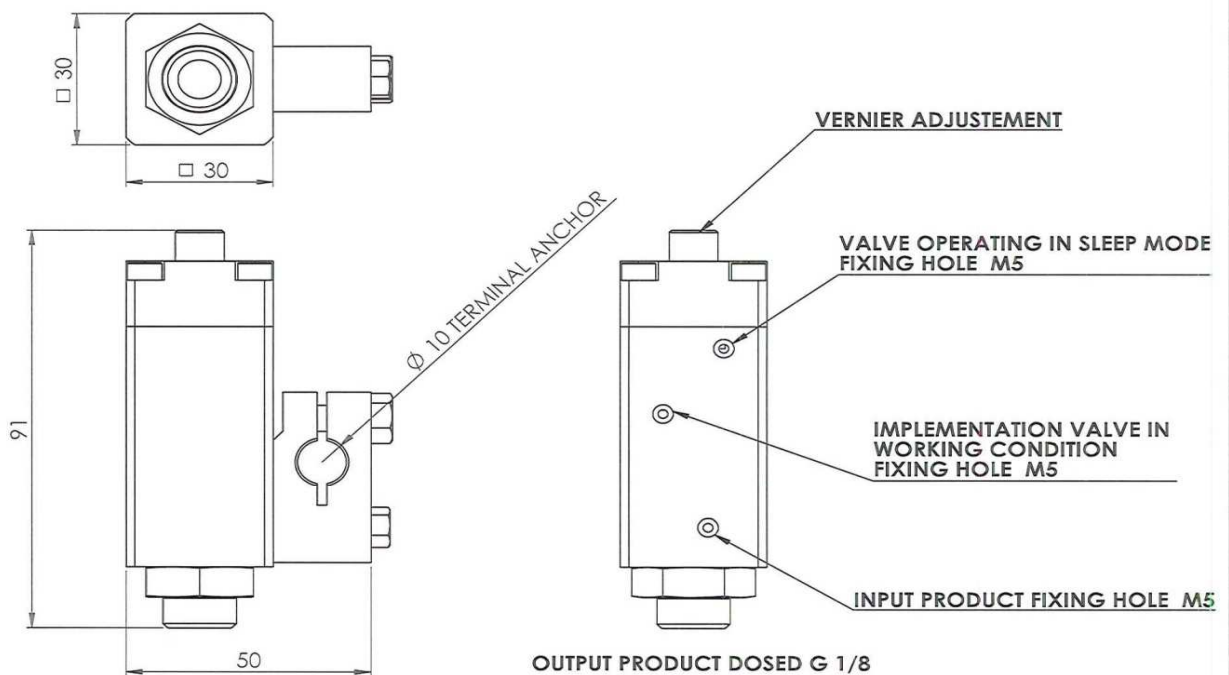

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SENSE ADVANCE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SENSE ADVANCE IS PROHIBITED.

TOLERANCES NOT SIGNED REF. UNI EN 22768 - mK

DWG NO. **DATA SHEET ZT-P**

HEAT TREATMENT

HARDNESS

DRAWN

CHECKED

REV.

Q.A.

DATE

MATERIAL

TRICKNESS H.T.

SCALE:



Condition Monitoring and Lubrication

BOLOGNA - ITALY



Condition Monitoring and Lubrication

BOLOGNA - ITALY

Via del Tipografo 6/a - 40138 Bologna - Italy
Tel. +39 051 534225 - Fax. +39 051 535083
sales@ognibenechaintech.com

www.senseadvance.it
www.ognibenechaintech.com