

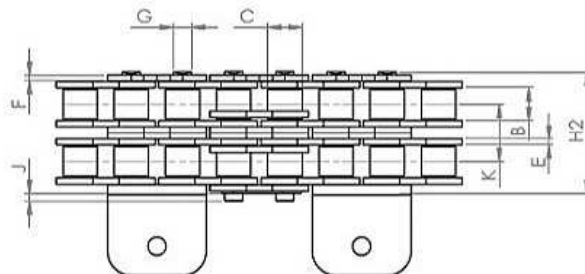

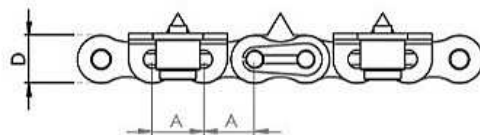


CATENA OE 08B2 CON ATTACCHI A PUNTA CON CONTRASTO

CHAIN OE 08B2 WITH CONTRASTING SPIKE ATTACK

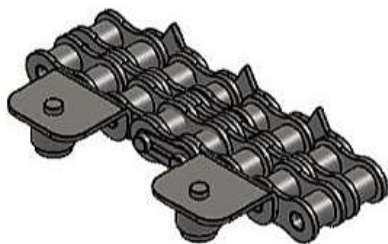

ISO STANDARD																		
CHAIN CODE	REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	D - PLATE HEIGHT MAX	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	K - TRANVERSE PICTH NOM	LENGHT MAX H2	HG	T	D	H	U	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
817576000	08B2	12.700	7.750	8.510	11.700	1.550	1.550	4.450	13.92	30.4	18.8	20.8	11	6.35	26.4	31100	31100	1.450
817576100	08B2	12.700	7.750	8.510	11.700	1.550	1.550	4.450	13.92	30.4	14.5	20.8	11	6.35	26.4	31100	31100	1.450

Catene fornite in rotoli da 5 m. accoppiate Dx - Sx



OGNIBENE S.P.A. - VIA DEL TIPOGRAFO, 6 - 40138 BOLOGNA - ITALY
 TEL: +39 051 534225 - FAX: +39 051 535083
sales@ognibenechaintech.it - www.ognibenechaintech.com