

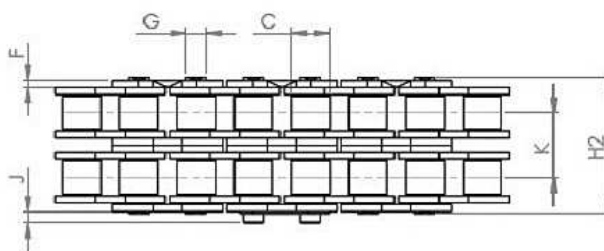

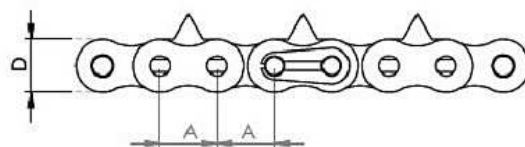


# CATENA OE 08B2 CON ATTACCHI A PUNTA

## CHAIN OE 08B2 WITH SPIKE ATTACK

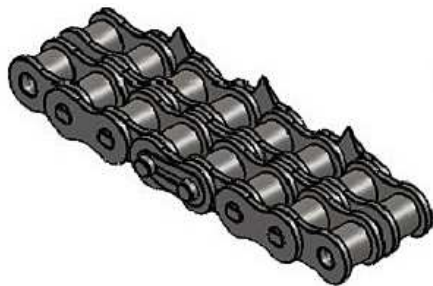

ISO STANDARD														
CHAIN CODE	REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	D - PLATE HEIGHT MAX	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	K - TRANVERSE PICTH NOM	LENGHT MAX H2	HG	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
6005D2100	08B2	12.700	7.750	8.510	11.700	1.550	1.550	4.450	13.92	30.4	14.5	31100	31100	1.380
6005D2000	08B2	12.700	7.750	8.510	11.700	1.550	1.550	4.450	13.92	30.4	18.0	31100	31100	1.380

Catene fornite in rotoli da 5 m. accoppiate Dx - Sx