

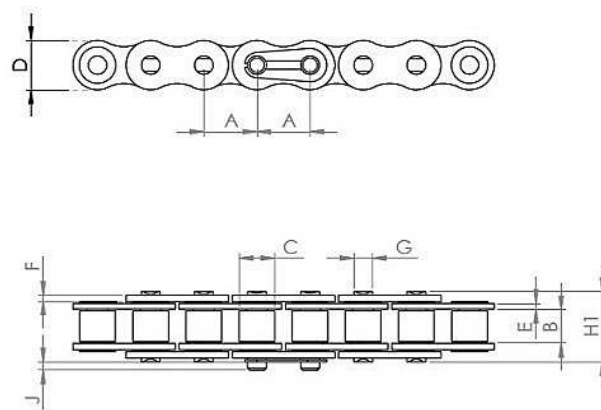


CATENE OE P.RING INOX AUTO LUBRIFICATE

CHAIN P.RING OE INOX MAINTENANCE FREE

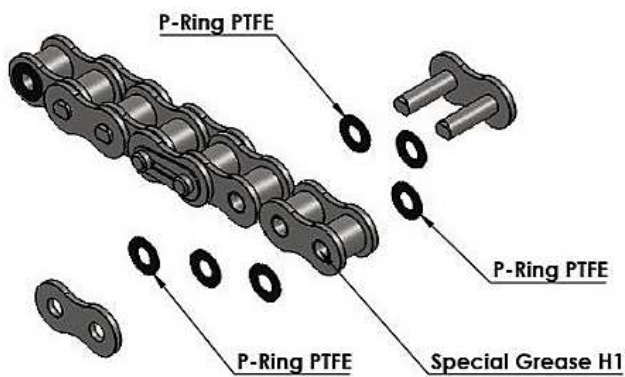

ISO STANDARD													
CHAIN CODE	REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	D - PLATE HEIGHT MAX	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	J - CONN. LINK EXTENSION MAX	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
6406B1PRB0000	06B1 SS PR	9.525	5.720	6.350	8.200	1.290	1.040	3.280	12.500	1.300	6850	7000	0.390
6408B1PRB0000	08B1 SS PR	12.700	7.750	8.510	11.700	1.550	1.550	4.450	16.500	2.000	12000	13000	0.700
6410B1PRB0000	10B1 SS PR	15.875	9.650	10.160	14.600	1.550	1.550	5.080	18.800	2.500	14700	16000	0.960
6412B1PRB0000	12B1 SS PR	19.050	11.680	12.070	16.000	1.810	1.810	5.720	21.900	2.600	18640	20000	1.220
6416B1PRB0000	16B1 SS PR	25.400	17.020	15.880	21.200	3.700	3.000	8.280	34.900	2.200	43160	45000	2.700