
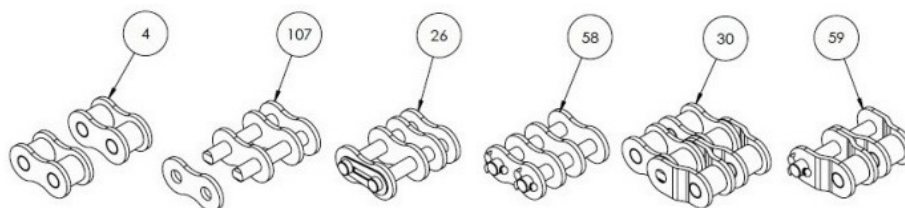


GRUPPO RENOLD CATENE RENOLD SOVEREIGN DOPPIE ISO

RENOLD GROUP RENOLD CHAIN SOVEREIGN DUPLEX ISO

RENOLD Sovereign

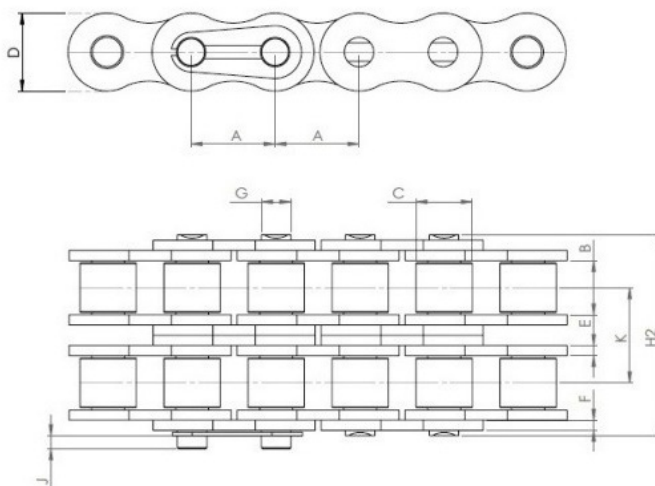

ISO STANDARD

CHAIN CODE	REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	D - PLATE HEIGHT MAX	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	K - TRANVERSE PICTH NOM	ISO606 TENSILE STRENGTH (NEWTONS) MIN	WEIGHT KG/M
6908B2SOV	08B2SOV	12.700	7.750	8.510	11.700	1.550	1.550	4.450	30.400	13.92	31100	1.380
6910B2SOV	10B2SOV	15.875	9.650	10.160	14.600	1.550	1.550	5.080	35.400	16.59	44500	1.690
6912B2SOV	12B2SOV	19.050	11.680	12.070	16.000	1.810	1.810	5.720	41.400	19.46	57800	2.420
6916B2SOV	16B2SOV	25.400	17.020	15.880	21.080	3.760	3.100	8.280	66.800	31.88	106000	5.500