

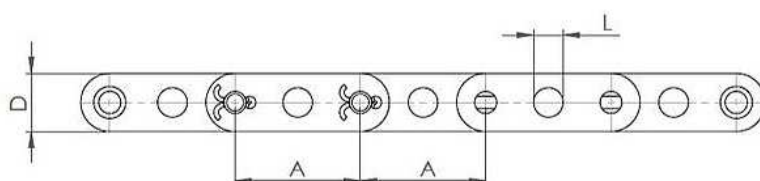


CATENA OE CON PIASTRE FORATE CENTRALI HV

CHAIN OE WITH HV CENTER HOLE PLATES HV

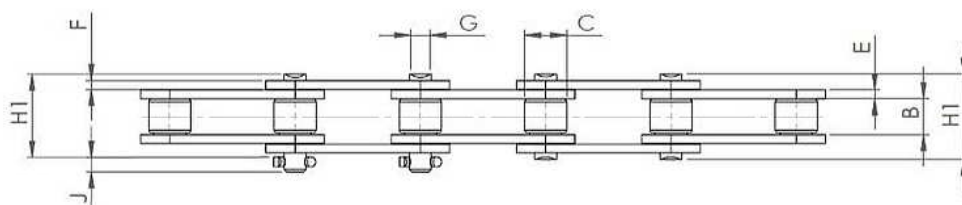

ANSI STANDARD

CHAIN CODE	REF.	PITCH (MM)	INSIDE WIDTH	ROLLER DIAM MIN	PLATE HEIGHT MAX	PLATE WIDTH INNER MAX	PLATE WIDTH OUTER MAX	PIN DIAM. MAX	PIN LENGTH MAX	CONN. LINK EXTENSION MAX	TRANVERSE PICTH NOM	PLATE HOLE	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
		A	B	C	D	E	F	G	H1	J	K	L			
512050800	C2050HV	31.750	9.530	10.160	15.100	2.400	2.400	5.080	24.000	1.400	-	7.00	32000	34000	1.000
552060800	C2060HV-SZ	38.100	12.700	11.910	17.200	3.200	3.200	5.940	31.700	1.500	-	8.20	40200	42000	1.400
812238000	C2061HV-NP	44.450	12.700	11.910	17.200	3.200	3.200	5.940	31.700	1.500	-	8.10	40200	42000	1.400
822238001	C2063HV-NP	50.800	12.700	11.910	17.200	3.200	3.200	5.940	31.700	1.500	-	8.10	40200	42000	1.400
512080000	C2080HV	50.800	15.880	15.880	24.100	4.000	4.000	7.940	38.700	1.700	-	10.10	68600	70000	2.300

ISO STANDARD

CHAIN CODE	REF.	PITCH (MM)	INSIDE WIDTH	ROLLER DIAM MIN	PLATE HEIGHT MAX	PLATE WIDTH INNER MAX	PLATE WIDTH OUTER MAX	PIN DIAM. MAX	PIN LENGTH MAX	CONN. LINK EXTENSION MAX	TRANVERSE PICTH NOM	PLATE HOLE	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
		A	B	C	D	E	F	G	H1	J	K	L			
516678000	C1603HV	25.400	7.750	8.510	11.800	1.500	1.800	4.450	19.500	1.300	-	6.00	19600	20600	0.600