


# Lubri System Oil SA-01

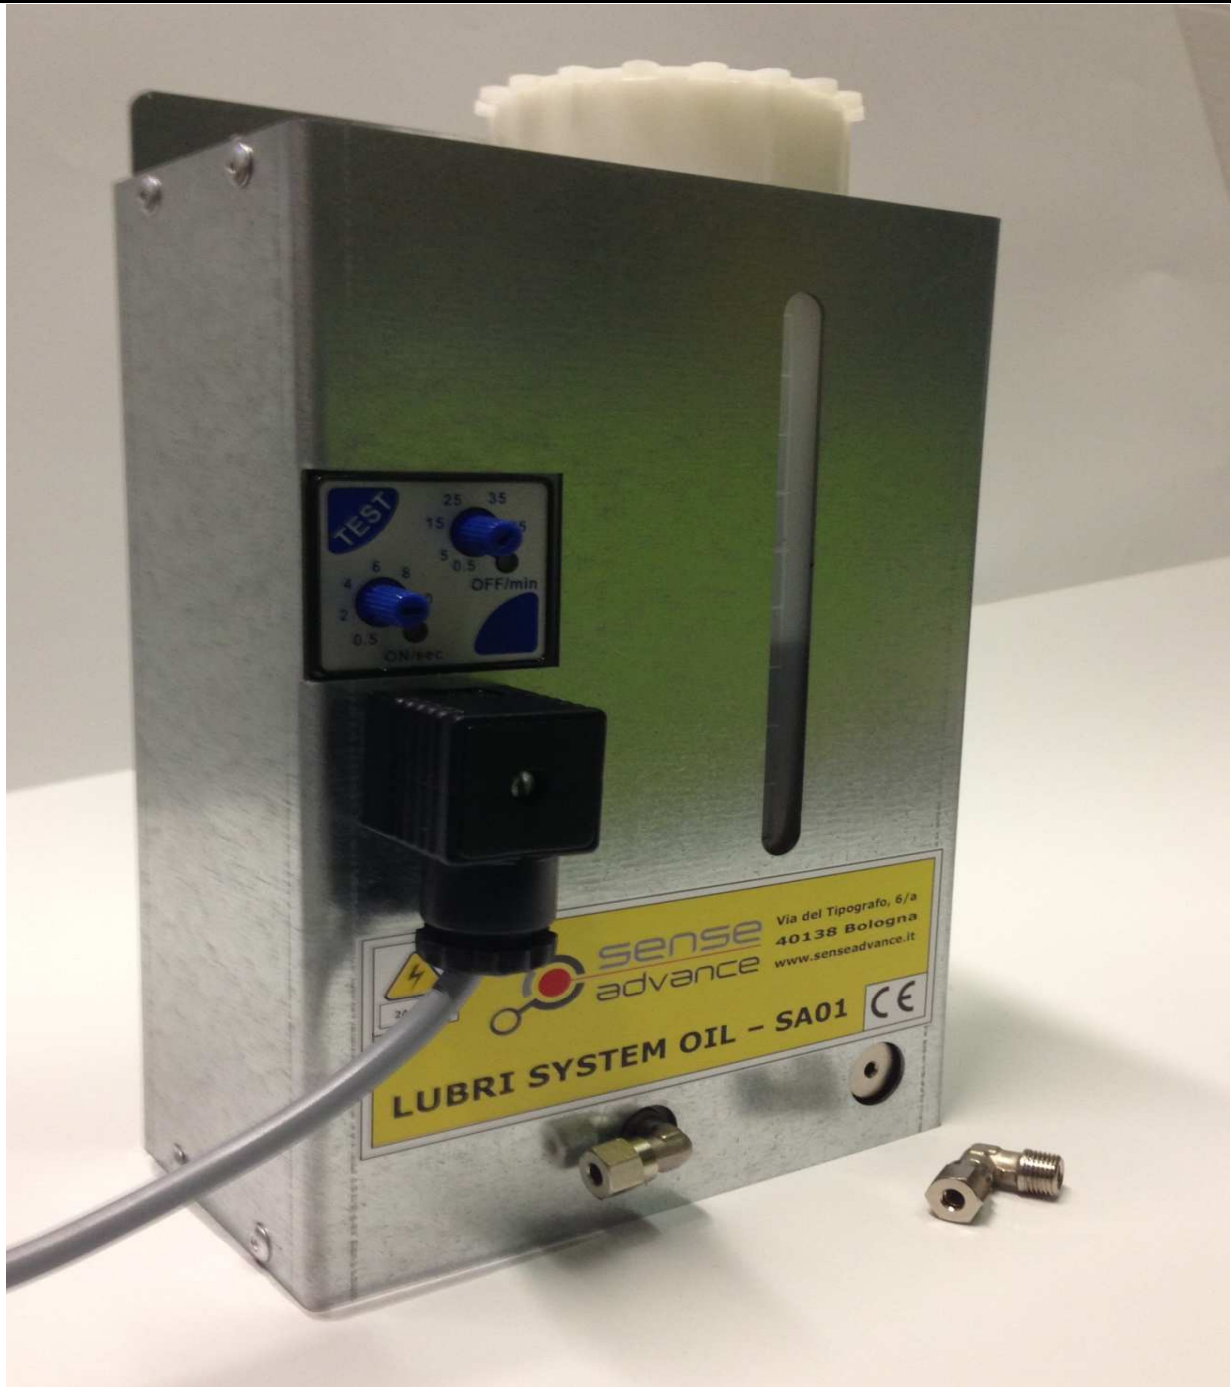

# Lubri System Oil SA-01

## LUBRI SYSTEM OIL SA-01

It is the ideal solution for easy applications that foreseen 1 or 2 lubrication points.

The coding is carried out in an extremely simple and fast way by means of the timer stayed on the front wall of the case.

Ideal for the lubrication of mechanical components in movement of any kind

Usable with different types of lubrication

## TECHNICAL DATA

Power:	24 VDC
Consumption:	2 A (max)
Operating Temperature:	Da 0°C a 50°C
Length Max. Pipes:	5 mt
Diameter Pipe:	4x2 mm
Time ON (provision)	0,5 sec. - 10 sec.
Time OFF (stop)	30 sec. - 45 min.
Capacity tank	1000 cc.
Viscosity lube:	2 < ISO VG < 460
Dry Weight	1750 g.
Dimensions	245 x 150 x 116 mm
Interlocking fixing holes X	100 mm < X < 130 mm




- 1 Timer for setting the cycle of lubrication
- 2 Power supply cable (with free end)
- 3 Window for visual inspection of the lubricant level
- 4 Plug with second output fitting kit
- 5 Fitting for insertion of the outlet pipe

## ACCESSOIRES



. Adjustable dispensing unit



A




B

. Examples of nozzles for applying the lubricant

## EXIT CONFIGURATIONS



. 1 Exit

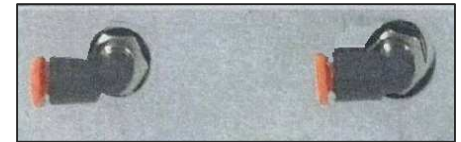

. 2 Exits

. For any additional information, please contact us directly



Condition Monitoring and Lubrication

BOLOGNA - ITALY

Via del Tipografo 6/a - 40138 Bologna - Italy

Tel. +39 051 534225 - Fax. +39 051 535083

sales@ognibenechaintech.com

www.senseadvance.it

www.ognibenechaintech.com