


Dispensing Valve DK-B17

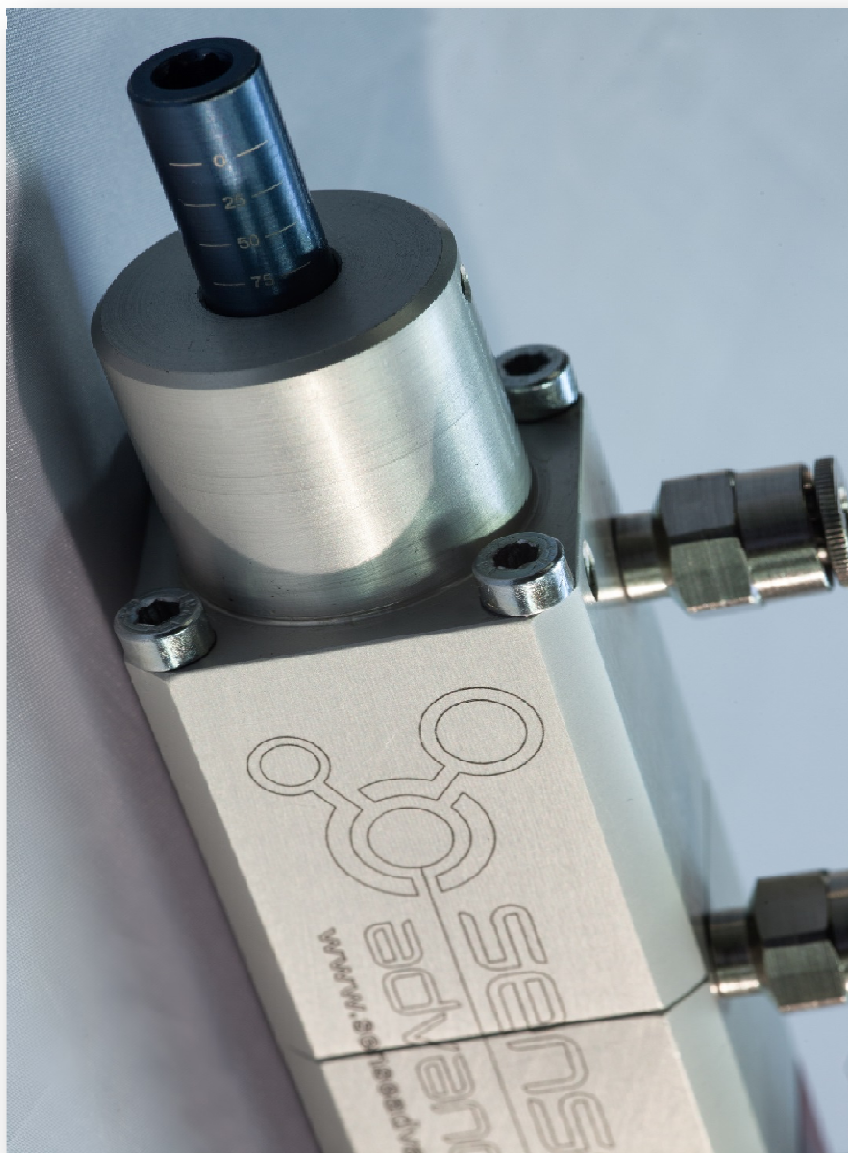

Dispensing ValveDK-B17

Dispensing Valve DK-B17

DOSABLE PRODUCTS: Lubricating Oils - Lubricating Greases - Assembly Paste - Siliconic Sealants etc.

- . The volumetric microdosing valves mod. DK-B17 allow to realize a lubrication, using viscous products, with high precision.
- . They are set up to dose a low pressure lubricant (from 0.10 to 1.40 MPa).
- . They have the possibility to be regulated, by means of a specific graduated vernier, within a fixed range (from 0.009cc to 0.300cc).
- . They have the dosing chamber separate from the pneumatic actuation to prevent accidental mixing between the product to be dosed and the compressed air of the actuation command.

TECHNICAL DATA

Power: *Pneumatic*

Operating temperature: *From 0 °C to 60 °C*

Tube diameter Input *8 x 6 PA 11*


Tube diameter Output *4 x 2 PA 11*

Volume Min. *0.009 cc*

Volume Max. *0.300 cc*

Lubricating viscosity *Lubricating greases*

Supply pressure max. *1,400 MPa*

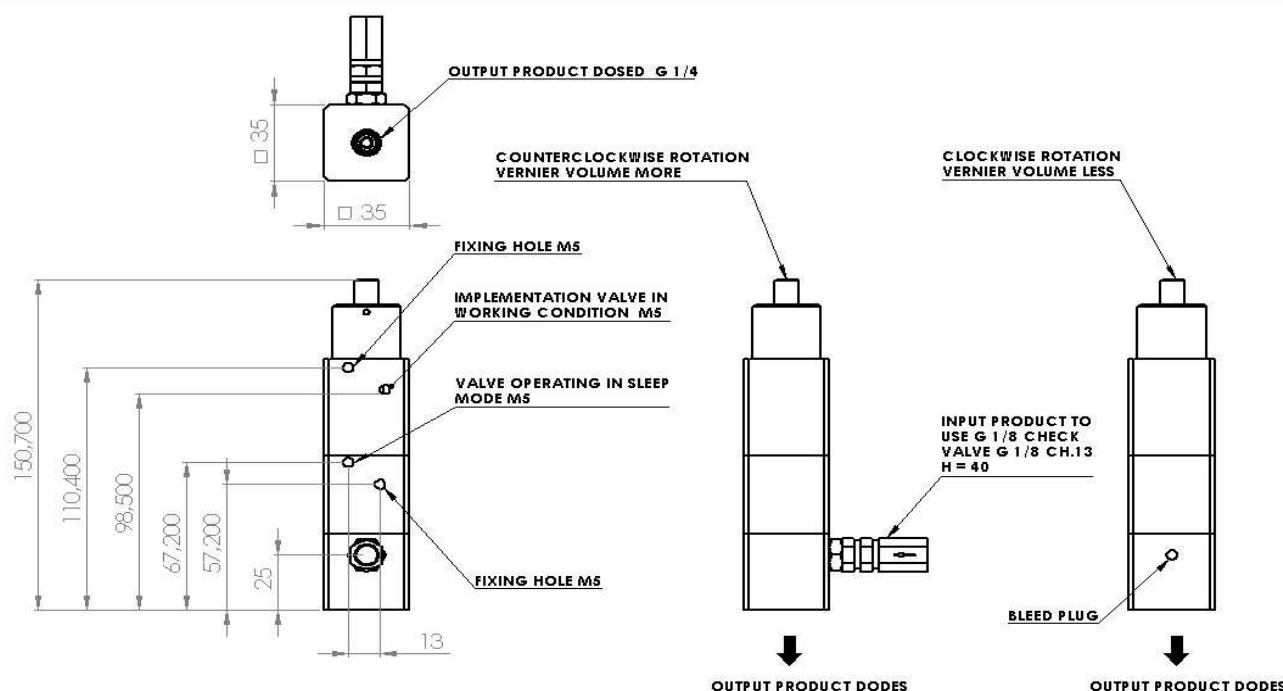

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
SENSE ADVANCE. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
SENSE ADVANCE IS
PROHIBITED.

TOLERANCES NOT SIGNED REF.
UNI EN 22768 - mK

DWG NO. **DATA SHEET DK-B**

HEAT TREATMENT

HARDNESS

DRAWN

CHECKED

REV.

G.A.

DATE

MATERIAL

THICKNESS H.T.

SCALE :



Condition Monitoring and Lubrication

BOLOGNA - ITALY



Condition Monitoring and Lubrication

BOLOGNA - ITALY

Via del Tipografo 6/a - 40138 Bologna - Italy

Tel. +39 051 534225 - Fax. +39 051 535083

sales@ognibenechaintech.com

www.senseadvance.it

www.ognibenechaintech.com