

# Valve ZT-P



# Valve ZT-P

## Valve ZT-P

**DOSAGE PRODUCTS:** Lubricating Oils - Evaporable Oils - Lubro-refrigerant liquids - Anti-sticking liquids for molding of plastic materials - Protective fluids - Silicon Oils - Inks - Lacquers - Paints - Diluents - Fluxing Cleaners - Vinyl adhesives etc.

The ZT-P dosing valves operate at low pressure, excluding the effects of atomization of the products used, guaranteeing healthier and cleaner working environments.

## TECHNICAL DATA

*Power: Pneumatic*

*Operating temperature: From 0 °C to 60 °C*

*Tube diameter Input 6x 4 PA 11*


*Tube diameter Output 4 x 2 PA 11*

*Min. Time Volume - Feed Pressure*

*Volume Max. Time - Pressure Supply*

*Lubricating viscosity Liquids*

*Supply pressure max. 0.100 MPa*

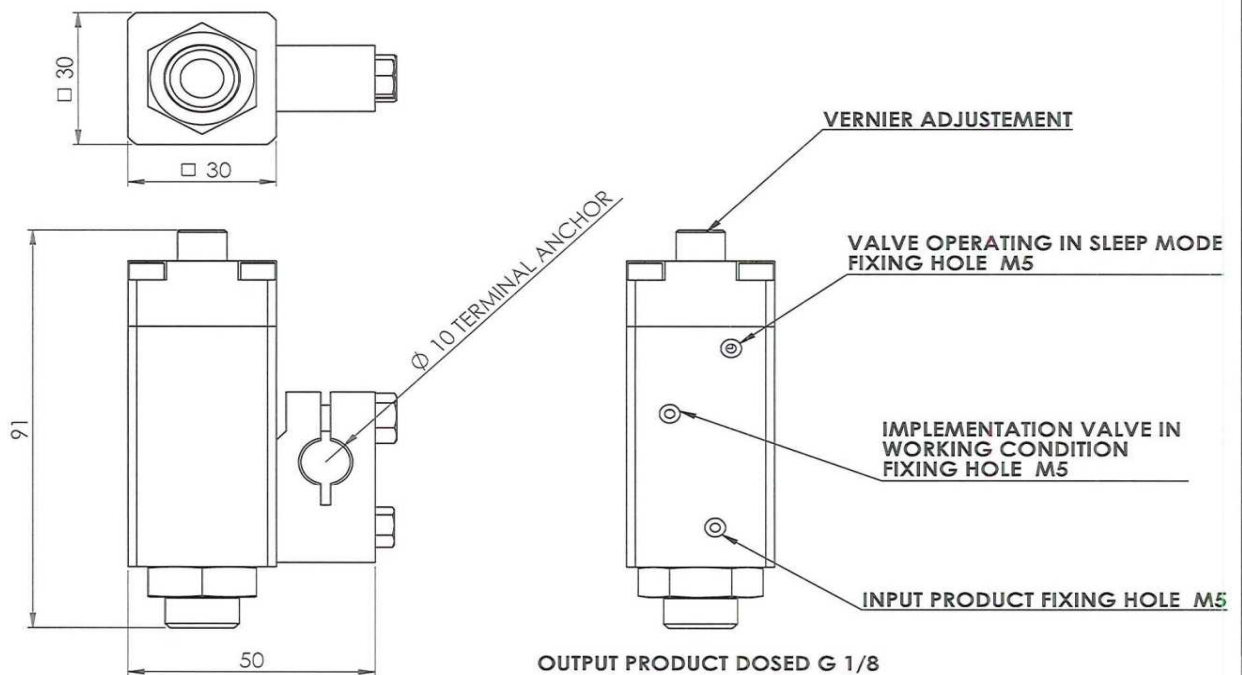

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
SENSE ADVANCE. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
SENSE ADVANCE IS  
PROHIBITED.

TOLERANCES NOT SIGNED REF.  
UNI EN 22768 - mK

DWG NO. DATA SHEET ZT-P

HEAT TREATMENT

HARDNESS

DRAWN

CHECKED

REV.

Q.A.

DATE

MATERIAL

THICKNESS H.T.

SCALE:



Condition Monitoring and Lubrication

BOLOGNA - ITALY



Condition Monitoring and Lubrication

BOLOGNA - ITALY

Via del Tipografo 6/a - 40138 Bologna - Italy

Tel. +39 051 534225 - Fax. +39 051 535083

sales@ognibenechaintech.com

www.senseadvance.it

www.ognibenechaintech.com