



CATENA 878 FLAT TOP

CHAINS 878 FLAT TOP

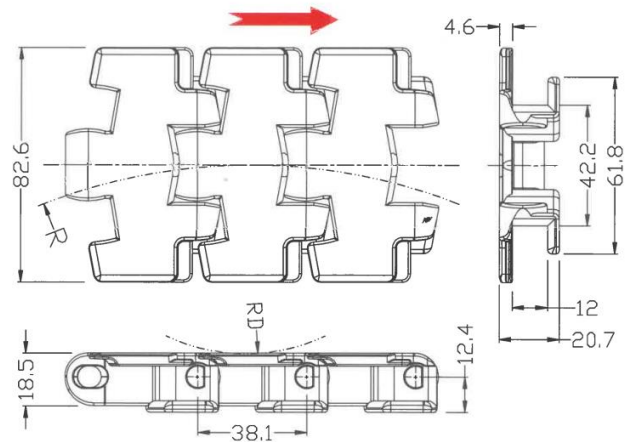

Chain Type	Chain width	Pitch	Sideflex Radius (Min)	Backflex Radius (Min)	Working Load(Max)	Weight	Chain Material
	mm	mm	mm	mm	牛頓 N (21℃)	Kg/m	
878AB-K325	82.6	38.1	200	50	2000	0.9	XLHS/XLGHS/PSHS

Packing Standard: 3.048 Meters/Box 10 Feet/Box (80 Links)

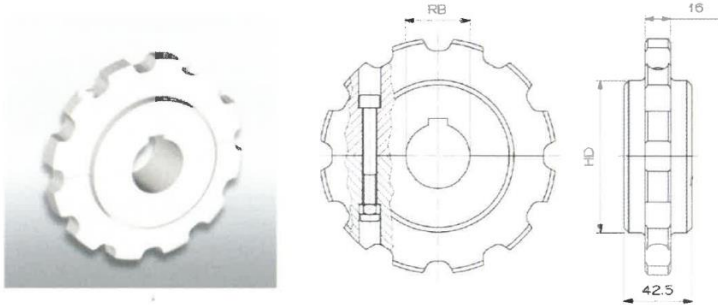

Sprocket Type	Number of Teeth	Bore	Pitch Diameter	Out Side Diameter	Standards
		mm	mm	mm	
878-T10-ZD	10	30/35/40	123.3	122.4	Machining
878-T11-ZD	11	30/35/40	135.2	134.9	
878-T12-ZD	12	30/35/40	147.2	147.3	

Sprocket Type	Number of Teeth	Bore	Pitch Diameter	Out Side Diameter	Standards
		mm	mm	mm	
878-T10-CD	10	30/35/40	123.3	122.4	Machining
878-T11-CD	11	30/35/40	135.2	134.9	
878-T12-CD	12	30/35/40	147.2	147.3	

Please contact to us if you need the Idler Wheel with bearing