



CATENE PER BRACCI TELESCOPICI LIFTER LL

CHAINS LIFTER LL

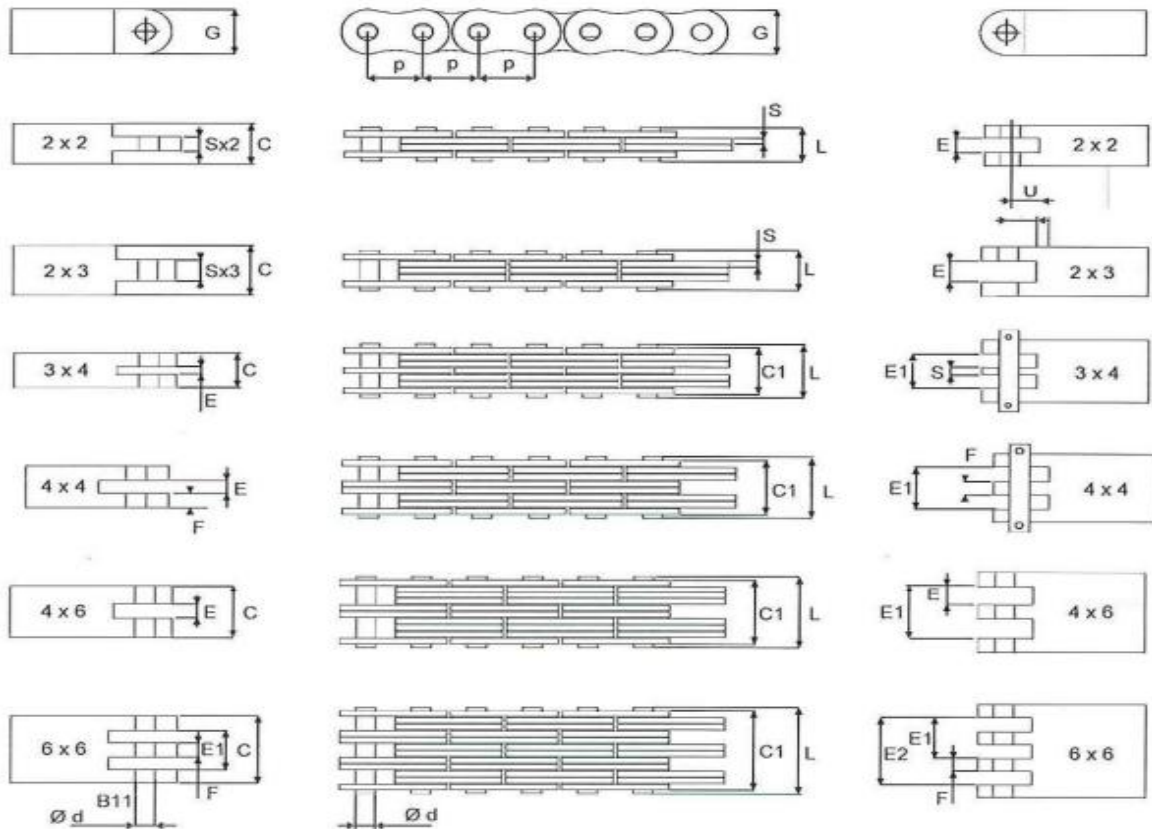

dimensioni (mm)

 Serie LL DIN 8152-1 ISO 4347	dimensioni catena										plastre terminali			dimensioni pettini				
	passo	altezza piastra	spessore massimo	è pieno	sviluppo x 100 passi	L	C1	carico rottura MINIMO FEM	peso catena	G1	D	S1	U	F	E	E1	E2	
	p	G	S	d	(mm)			(kN)	q	(Kg/m)								
LL 0822	12.70	2 x 2	10.7	1.69	4.45	1259	8.9	7.0	22.5	0.44	22.0	12.0	1.65	7.5	3.3	3.4	-	-
LL 0844		4 x 4					15.9	14.0	45.0	0.87						3.4	10.5	-
LL 0866		6 x 6					22.8	21.0	67.0	1.30						3.4	-	17.4
LL 1022	15.875	2 x 2	12.8	1.55	5.08	1577	8.9	6.7	24.0	0.47	-	-	-	9.5	3.1	3.3	-	-
LL 1044		4 x 4					15.6	13.4	50.0	0.92						3.3	9.7	-
LL 1066		6 x 6					22.2	20.0	74.0	1.36						3.3	-	16.1
LL 1222	19.05	2 x 2	14.8	1.81	5.72	1892	10.0	7.6	37.5	0.62	-	-	-	11.0	3.6	3.8	-	-
LL 1244		4 x 4					17.8	15.4	75.0	1.21						3.8	10.2	-
LL 1266		6 x 6					24.8	22.4	112.0	1.79						3.8	-	18.6
LL 1622	25.40	2 x 2	20.2	3.06	8.27	2532	15.5	12.5	78.0	1.42	44.0	25.0	3.00	13.5	6.2	6.8	-	-
LL 1644		4 x 4					28.1	25.1	155.0	2.79						6.8	19.1	-
LL 1666		6 x 6					40.5	37.3	230.0	4.15						6.8	-	31.6
LL 2022	31.75	2 x 2	25.3	3.56	10.17	3157	18.2	14.9	110.0	2.03	-	-	-	17.0	7.1	7.3	-	-
LL 2044		4 x 4					33.4	30.1	220.0	4.00						7.3	21.7	-
LL 2066		6 x 6					47.9	44.3	330.0	5.96						7.3	-	36.1
LL 2422	38.10	2 x 2	30.7	5.08	14.63	3797	25.4	21.4	172.0	3.60	56.0	32.0	2.5x2	22.0	10.2	10.5	-	-
LL 2444		4 x 4					46.8	42.8	345.0	7.07						10.5	31.2	-
LL 2466		6 x 6					68.2	64.2	510.0	10.53						10.5	-	51.9