


CATENA INOX SSK MATERIALE RINFORZATO

SSK STAINLESS STEEL CHAIN REINFORCED MATERIALS



Dimensional Drawing

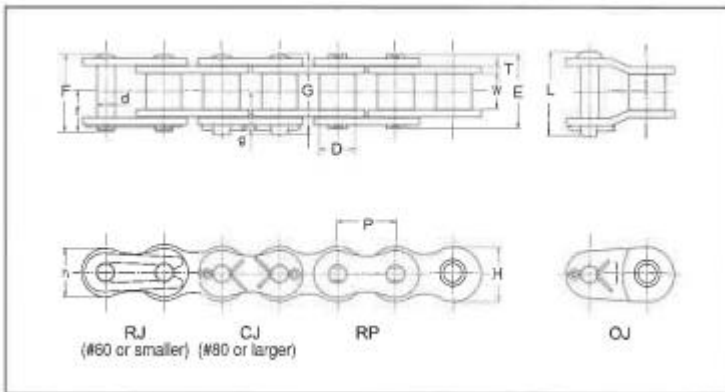

Catene con piastre in SS 410
Perni catena in SS 630
Busssole e rulli in SS 635 dal pieno

Plates chains SS 410 material
Pins SS 635 material
Buches and roller solid SS 635 material

Dimensions

Chain No.	Pitch		Roller link width	Roller (Bush) dia.	Pin						Plate			Approx. weight (kg/m)
	P	W			D	d	E	F	G	f	g	L	T	
* DID 25SS	6.35	3.18	(3.30)	2.31	7.65	8.65	—	4.83	—	—	0.75	5.8	5.0	0.14
* DID 35SS	9.525	4.78	(5.08)	3.59	11.55	12.90	—	7.13	—	13.85	1.25	8.8	7.3	0.33
DID 40SS 40SSK	12.70	7.95	7.92	3.97	16.15	17.65	—	9.58	—	19.05	1.50	11.7	10.1	0.63
DID 50SS 50SSK	15.875	9.53	10.16	5.09	20.40	21.80	—	11.60	—	23.05	2.00	14.6	12.6	1.04
DID 60SS 60SSK	19.05	12.70	11.91	5.96	25.40	26.90	—	14.20	—	29.55	2.40	17.5	15.0	1.50
DID 80SS 80SSK	25.40	15.88	15.88	7.94	32.30	—	35.40	—	19.25	37.10	3.20	23.0	19.7	2.62
DID 100SS	31.75	19.05	19.05	9.54	40.40	—	43.35	—	23.15	44.05	4.00	28.9	24.8	4.09

Note: Those marked with * indicate bushing chains.



OGNIBENE S.P.A. _ VIA DEL TIPOGRAFO, 6 _ 40138 BOLOGNA _ ITALY
TEL: +39 051 534225 _ FAX: +39 051 535083
sales@ognibenechaintech.it _ www.ognibenechaintech.com