
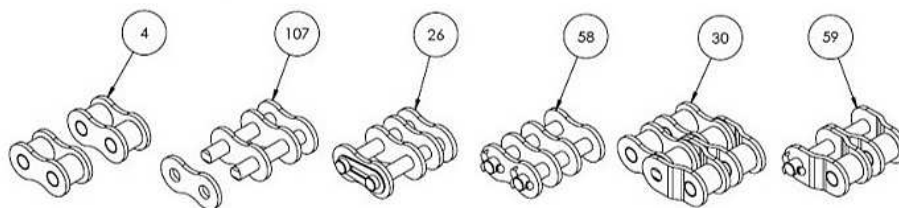
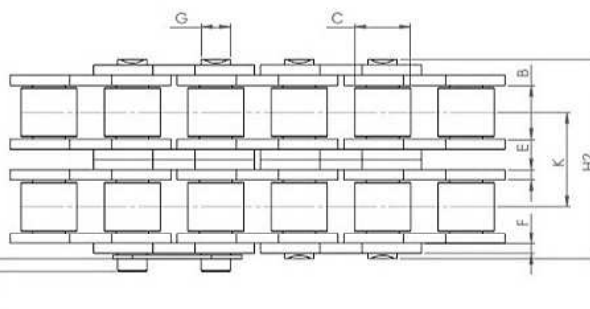


CATENE OE NICHELATE SB BUSSOLE SOLIDE DOPPIE ISO

CHAIN OE NICKEL PLATED SB SOLID BUSH DUPLEX ISO

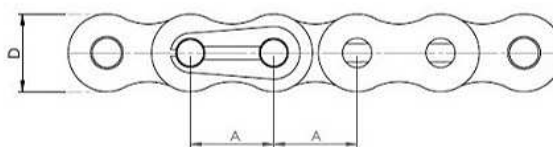

ISO STANDARD

CHAIN CODE	REF.	PITCH (MM)	INSIDE WIDTH	ROLLER DIAM MIN	PLATE HEIGHT MAX	PLATE WIDTH INNER MAX	PLATE WIDTH OUTER MAX	PIN DIAM. MAX	PIN LENGTH MAX	CONN. LINK EXTENSION MAX	TRANVERSE PICTH NOM	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
		A	B	C	D	E	F	G	H1	J	K			
6520002200	06-B2	9.525	5.720	6.350	8.260	1.300	1.040	3.280	23.000	1.300	10.24	16900	16900	0.740
6520003200	08-B2	12.700	7.750	8.510	11.810	1.550	1.550	4.450	30.400	1.500	13.92	31100	31100	1.380
6520004200	10-B2	15.875	9.650	10.160	14.730	1.550	1.550	5.080	35.400	1.300	16.59	44500	44500	1.800
6520005200	12-B2	19.050	11.680	12.070	16.130	1.800	1.800	5.720	41.400	1.100	19.46	57800	57800	2.400
6520006200	16-B2	25.400	17.020	15.880	21.080	3.760	3.100	8.280	68.000	5.400	31.88	106000	106000	5.500
6520007200	20-B2	31.750	19.560	19.050	26.420	4.620	3.610	10.190	76.700	6.100	36.45	170000	170000	7.800
6520008200	24-B2	38.100	25.400	25.400	33.400	6.100	5.080	14.630	101.300	6.800	48.36	280000	280000	14.800



OGNIBENE S.P.A. - VIA DEL TIPOGRAFO, 6 - 40138 BOLOGNA - ITALY
 TEL: +39 051 534225 - FAX: +39 051 535083
sales@ognibenechaintech.it - www.ognibenechaintech.com