


CATENE MOTO

CHAIN MOTORCYCLE



D.I.D

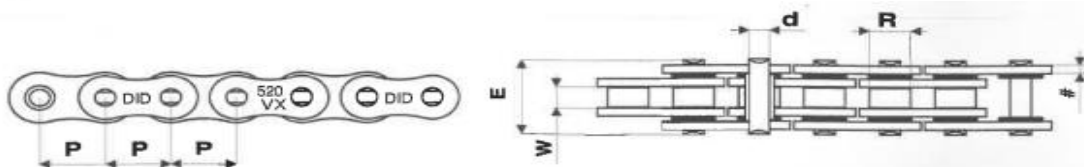

D.I.D ROAD STANDARD												
DID	Plate	DID			Diam	Diam	Length	Plate	O	Tensile		
chain	color	code	pitch	width	roller	pin	pin	inn / outer	Ring	strength	cc	Application
			P	W	R	d	E	T	OR	KN		
420D	B&B	40-1232	12,700	6,35	7,77	3,97	14,80	1,5 / 1,5	-	18,50	85	Moped
428D	B&B	40-1246	12,700	7,94	8,51	4,51	16,70	1,5 / 1,5	-	19,70	125	Road
520-NZ	B&B	40-1509	15,875	6,35					-		250-450	Old models
530-NZ	B&B	40-1544	15,875	9,53	10,20	5,23	22,50	2,4 / 2,4	-	38,30	500-750	Old models

D.I.D ROAD PROFESSIONAL												
DID	Plate	DID			Diam	Diam	Length	Plate	O	Tensile		
chain	color	code	pitch	width	roller	pin	pin	inn / outer	Ring	strength	cc	Application
			P	W	R	d	E	T	OR	KN		
428-VX	G&B	40-1253	12,700	7,94	8,60	5,00	20,70	2,0 / 2,0	X	33,00	400	Road Enduro Motard
520-VX3	G&B	40-1540	15,875	6,35	10,22	5,23	18,70	2,0 / 2,0	X	36,50	> 800	Road Enduro Motard
525-VX3	G&B	40-1547	15,875		10,32			2,2 / 2,2	X	44,36	900	Road
530-VX3	G&B	40-1587	15,875		10,32			2,2 / 2,2	X	44,36	1000	Road
632-ZLV	B&B	40-1570	15,875	9,53	11,10	5,24	24,80	2,4 / 2,4	X	43,40	600-1200	Old models
630-V	B&B	40-1920	19,050	9,53	11,96	5,97	25,30	2,4 / 2,4	O	48,10	900	Old models
632-V	B&B	40-1970	19,050	9,53	12,70	5,97	25,30	2,4 / 2,4	O	48,10	1100	Old models

D.I.D SUPER ROAD - SPORT												
DID	Plate	DID			Diam	Diam	Length	Plate	O	Tensile		
chain	color	code	pitch	width	roller	pin	pin	inn / outer	Ring	strength	cc	Application
			P	W	R	d	E	T	OR	KN		
520-ZVMX	G&G	40-1582	15,875	6,35	10,22	5,23	21,10	2,2 / 2,2	X	38,90	1200	Super Road
525-ZVMX	G&G	40-1583	15,875	7,94	10,32	5,50	23,20	2,4 / 2,6	X	46,30	1300	Super Road
530-ZVMX	G&G	40-1584	15,875	9,53	10,32	5,50	24,90	2,4 / 2,6	X	46,30	1400	SuperRoad

D.I.D RACING ROAD												
DID	Plate	DID			Diam	Diam	Length	Plate	O	Tensile		
chain	color	code	pitch	width	roller	pin	pin	inn / outer	Ring	strength	cc	Application
			P	W	R	d	E	T	OR	KN		
415-ERZ	G&G	40-1224	12,700	4,96	7,77	3,96	13,50	1,5 / 1,5	-	20,20	125/250	Moto3 250 4T
520-ERV7	G&G	40-1548	15,875		10,32			2,0 / 2,0	X	39,50	600-1000	SBK - Moto2 - MotoGP

D.I.D OFF-ROAD												
DID	Plate	DID			Diam	Diam	Length	Plate	O	Tensile		
chain	color	code	pitch	width	roller	pin	pin	inn / outer	Ring	strength	cc	Application
			P	W	R	d	E	T	OR	KN		
428-VX	G&B	40-1253	12,700	7,94	8,60	5,00	20,70	2,0 / 2,0	X	33,00	400	Enduro
520-DZ2	G&B	40-1505	15,875	6,35	10,16	5,09	17,65	2,0 / 2,0	-	36,00	125-250	Cross
520-VX3	G&B	40-1540	15,875	6,35	10,22	5,23	18,70	2,0 / 2,0	X	36,50	> 800	Enduro Motard
520-ZVMX	G&G	40-1582	15,875	6,35	10,22	5,23	21,10	2,2 / 2,2	X	38,90	400-600	Atv Quad

D.I.D RACING OFF-ROAD												
DID	Plate	DID			Diam	Diam	Length	Plate	O	Tensile		
chain	color	code	pitch	width	roller	pin	pin	inn / outer	Ring	strength	cc	Application
			P	W	R	d	E	T	OR	KN		
415-ERZ	G&G	40-1224	12,700	4,96	7,77	3,96	13,50	1,5 / 1,5	-	20,20	50-250	Racing trial
420-NZ3	G&B	40-1235	12,700	6,35	7,77	3,96	16,75	1,8 / 1,8	-	21,90	50-125	Supercross
428-NZ	G&B	40-1248	12,700	7,94	8,50	4,50	18,90	2,0 / 2,0	-	25,50	50-250	Supercross
520-ERT3	G&G	40-1503	15,875	6,35	10,16	5,32	17,50	2,0 / 2,0	-	37,00	250-450	Racing cross
520-ERS3	G&G	40-1502	15,875	6,35	10,16		16,75	1,8 / 1,8		25,90	125-250	Racing trial
520-ERVT	G&G	40-1541	15,875	6,35	10,16	5,20	18,50	1,8 / 2,0	X	37,5	450-650	Racing Enduro
520-MX	G&B	40-1528	15,875	6,35	10,16	5,32	18,60	2,2 / 2,2	-	39,70	450-650	Supermotard
520-ATV	G&B	40-1508	15,875	6,35	10,22	5,20	21,00	2,2 / 2,2	X	33,90	400-750	Racing Atv