

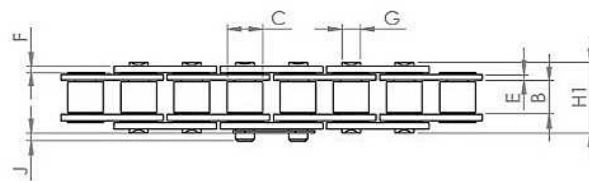
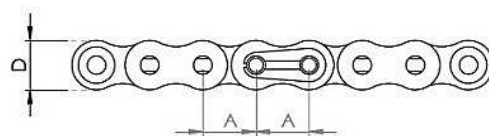


CATENE OE P.RING AUTO LUBRIFICATE

CHAIN P.RING OE MAINTENANCE FREE

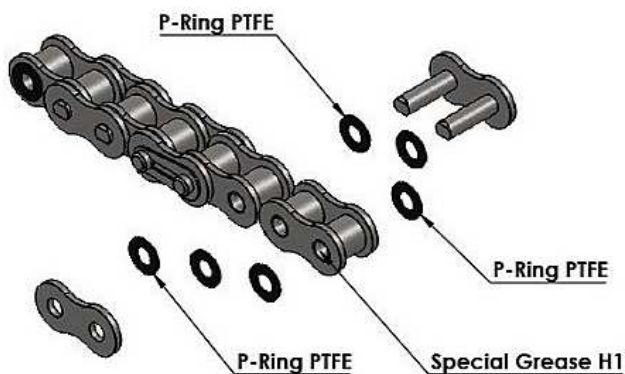

ISO STANDARD												
CHAIN CODE	REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	D - PLATE HEIGHT MAX	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	J - CONN. LINK EXTENSION MAX	ISO606 TENSILE STRENGTH (NEWTONS) MIN	WEIGHT KG/M
4706B1PRB0000	06B1	9.525	5.720	6.350	8.200	1.290	1.040	3.280	12.500	1.300	6850	0.390
4708B1PRB0000	08B1	12.700	7.750	8.510	11.700	1.550	1.550	4.450	16.500	2.000	12000	0.700
4710B1PRB0000	10B1	15.875	9.650	10.160	14.600	1.550	1.550	5.080	18.800	2.500	14700	0.960
4712B1PRB0000	12B1	19.050	11.680	12.070	16.000	1.810	1.810	5.720	21.900	2.600	18640	1.220
4716B1PRB0000	16B1	25.400	17.020	15.880	21.200	3.700	3.000	8.280	34.900	2.200	43160	2.700