


CATENE CHJC LIFTER SERIE LL

CHAINS CHJC LIFTER TYPE LL



ISO STANDARD								
CHAIN CODE	REF.	A - PITCH (MM)	COMBINAZIONE	B	D	E	ISO606 TENSILE STRENGTH (NEWTONS) MIN	WEIGHT KG/M
1222	LL 0822	12.700	2x2	1.69	4.54	8.9	21000	0.440
1244	LL 0844	12.700	4x4	1.69	4.45	15.9	42000	0.870
1266	LL 0866	12.700	6x6	1.69	4.45	22.8	64000	1.300
1522-L	LL 1022	15.875	2x2	1.55	5.08	8.9	22700	0.470
1544-L	LL 1044	15.875	4x4	1.55	5.08	15.6	45400	0.920
1566-L	LL 1066	15.875	6x6	1.55	5.08	22.2	68100	1.360
1922-L	LL 1222	19.05	2x2	1.81	5.72	10.0	32000	0.620
1944-L	LL 1244	19.05	4x4	1.81	5.72	17.8	64000	1.210
1966-L	LL 1266	19.05	6x6	1.81	5.72	24.8	96000	1.790
2522	LL 1622	25.4	2x2	3.06	8.27	15.5	72000	1.420
2544	LL 1644	25.4	4x4	3.06	8.27	28.1	144000	2.790
2566	LL 1666	25.4	6x6	3.06	8.27	40.5	216000	4.150
2022	LL 2022	31.75	2x2	3.56	10.17	18.2	95000	2.030
2044	LL 2044	31.75	4x4	3.56	10.17	33.4	190000	4.000
2066	LL 2066	31.75	6x6	3.56	10.17	47.9	285000	5.960
2422	LL 2422	38.1	2x2	5.08	14.63	25.4	170000	3.600
2444	LL 2444	38.1	4x4	5.08	14.63	46.8	340000	7.070
2446	LL 2466	38.1	6x6	5.08	14.63	68.2	510000	10.530
-	LL 3244	50.8	4x4	6.45	17.81	61	520000	12.600
-	LL 4066	63.5	6x6	8.25	22.89	111.10	1080000	30.200
NOT ISO 4347	LL 4088	63.5	8x8	8.25	22.89	139	1440000	38.700

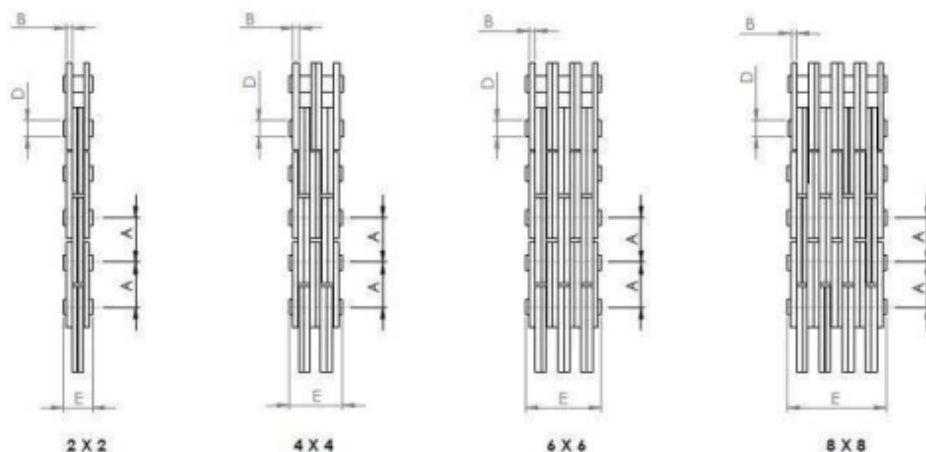

OGNIBENE S.P.A. _ VIA DEL TIPOGRAFO, 6 _ 40138 BOLOGNA _ ITALY
 TEL: +39 051 534225 _ FAX: +39 051 535083
sales@ognibenechaintech.it _ www.ognibenechaintech.com